


# AERODROME CHART

VANCOUVER INTL  
VANCOUVER BC

<b>VOT</b> 114.8	<b>ATIS</b> 124.6	<b>CLNC DEL</b> 121.4	<b>GND</b> 121.7(S) 127.15(N) 275.8	<b>TWR</b> 118.7(S) 119.55(N) 226.5	<b>DEP</b> 126.125(N) 132.3(S) 363.8
---------------------	----------------------	--------------------------	---	---	--

DECLARED DISTANCES	08R	26L	08L	26R	12	30
	TORA	11,500	11,500	9940	9940	7300
TODA	12,500	12,500	10940	10940	8300	8300
ASDA	11,500	11,500	9940	9940	7300	7300
LDA	11,000	11,500	9940	9940	7300	7300

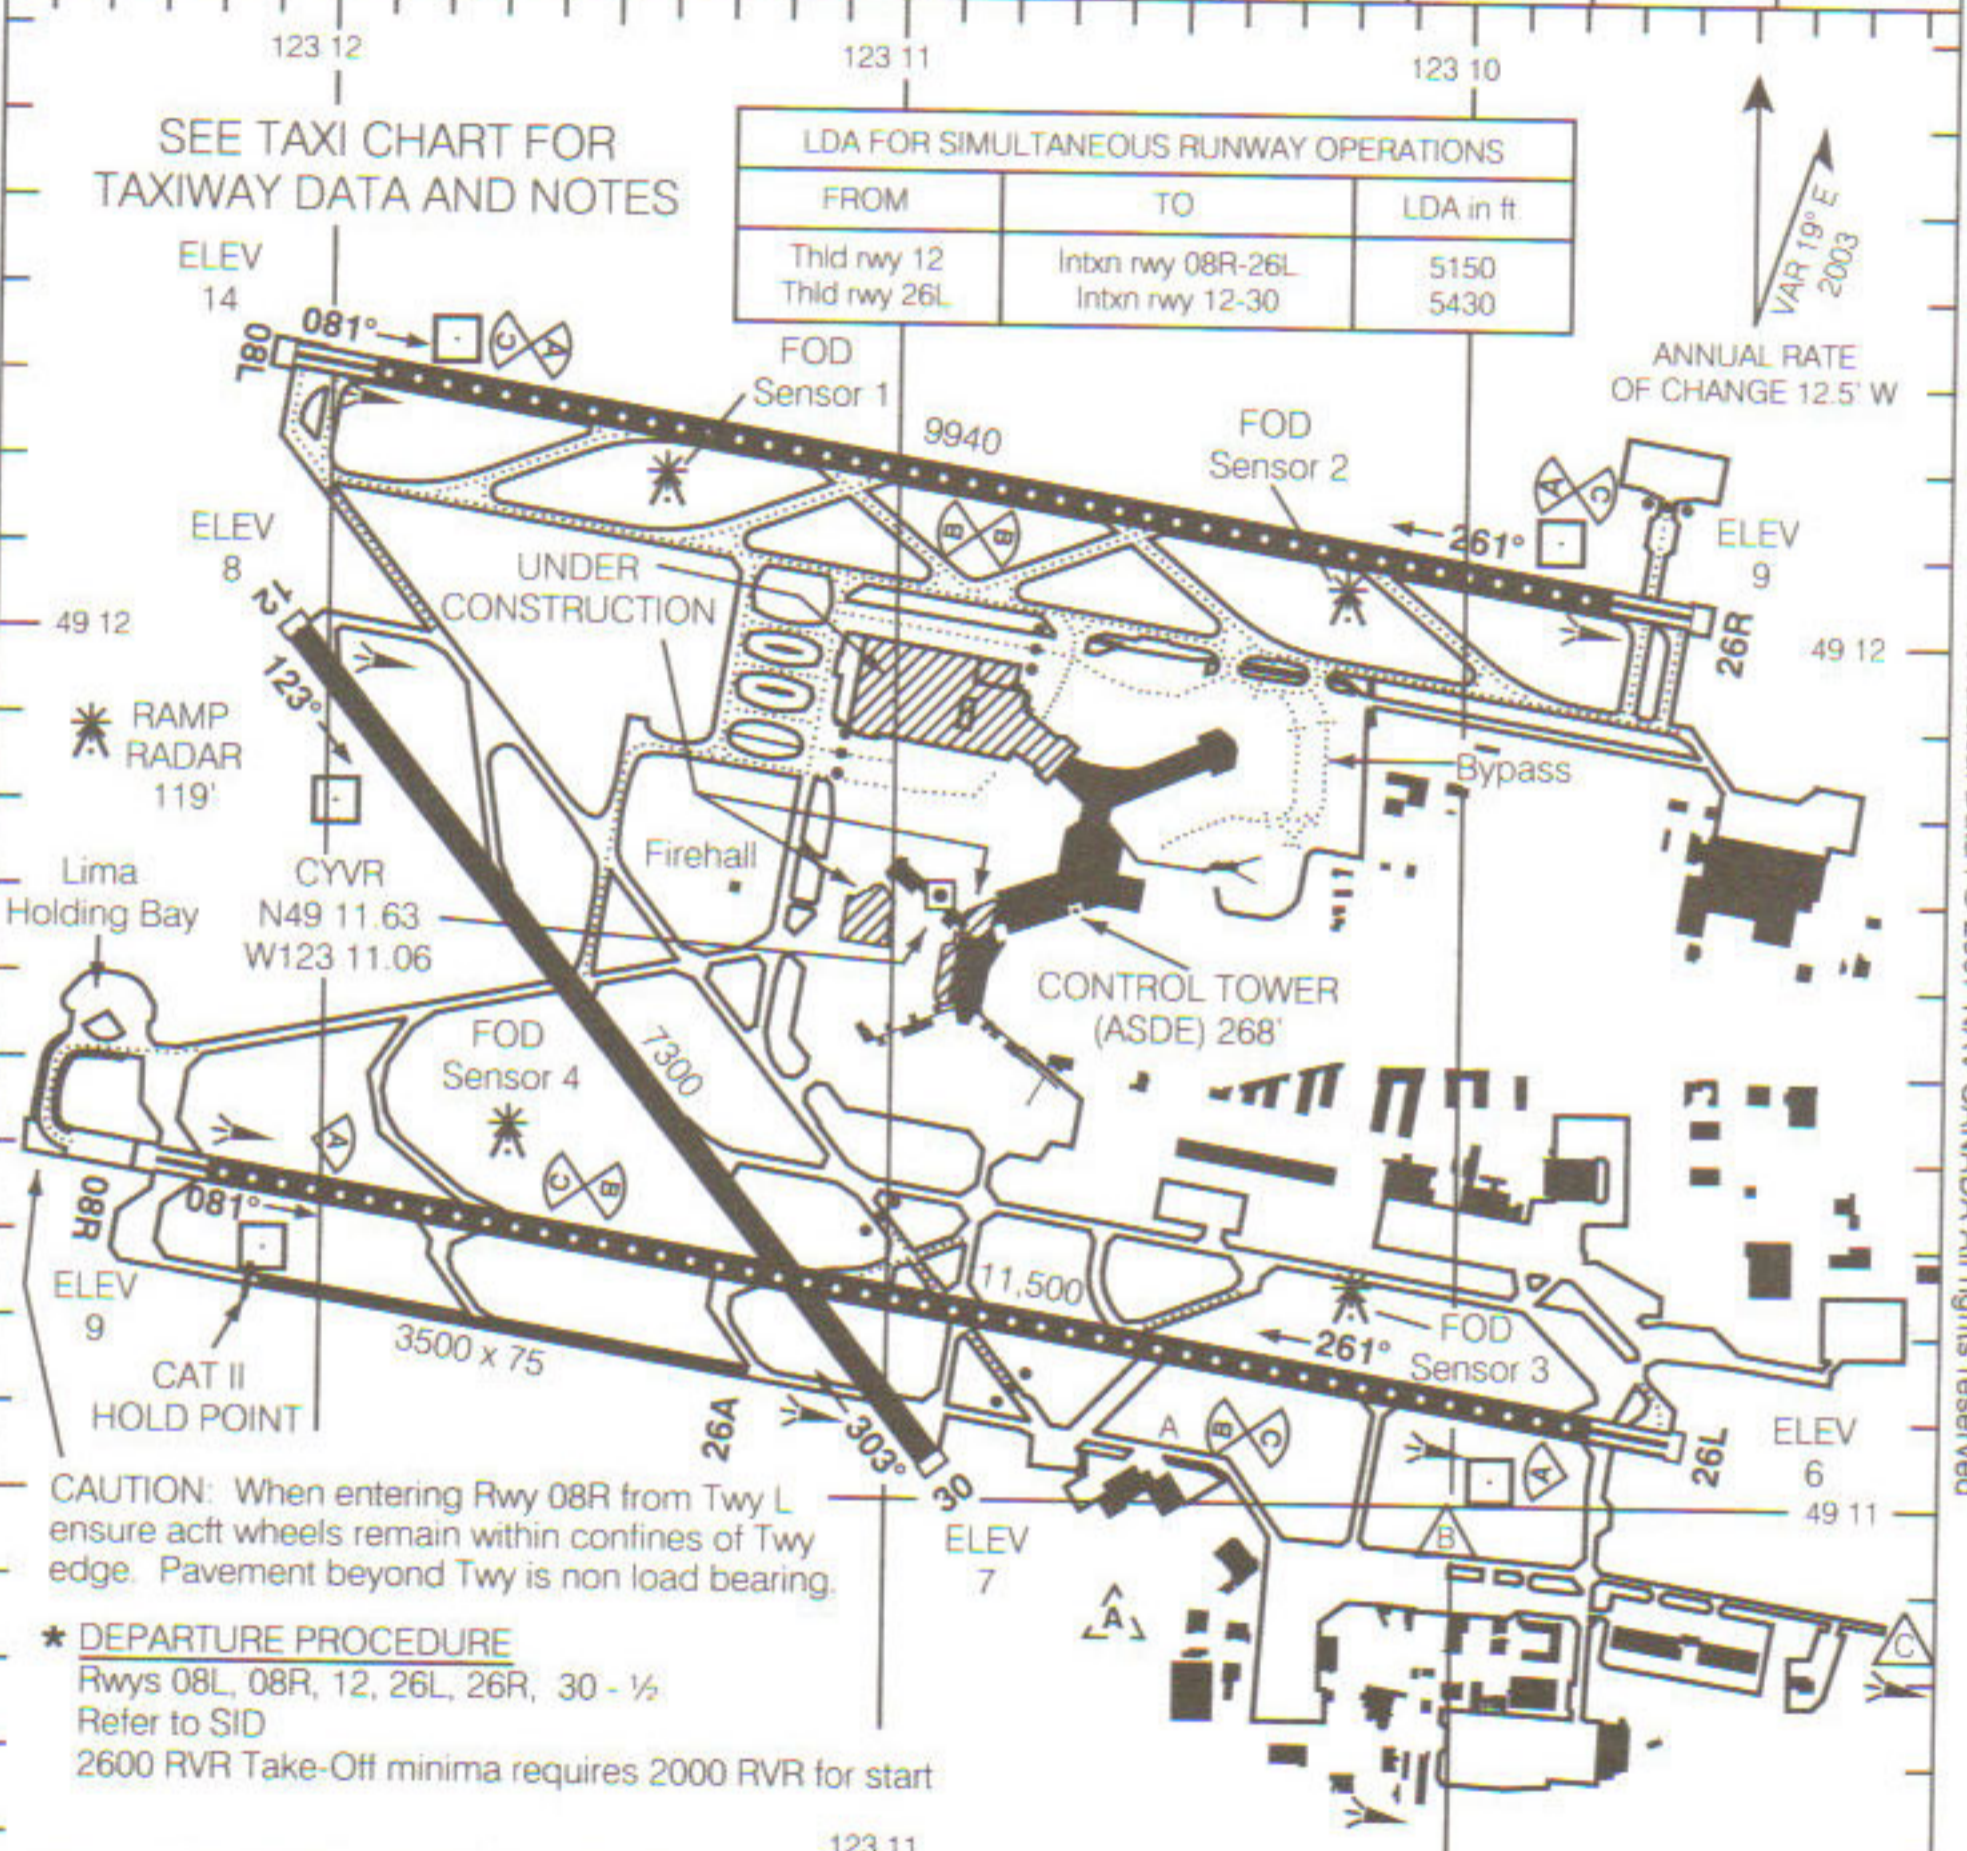

CAUTION: When entering Rwy 08R from Twy L ensure act wheels remain within confines of Twy edge. Pavement beyond Twy is non load bearing.

\* **DEPARTURE PROCEDURE**  
Rwys 08L, 08R, 12, 26L, 26R, 30 - 1/2  
Refer to SID  
2600 RVR Take-Off minima requires 2000 RVR for start

TORA FOR INTERSECTION DEPARTURES											
RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft
08L	M8	9420	26R	M7/N7	9420	08R	A6/L2	8320	26L	D5/C	10740
	M6	7060		M5	7060		A4	6590		B	9550
	M4	5260		M3	5260		E/H	4850		D3	7400
							L4/A	10600		E/H	6270

TAKE-OFF MINIMA

All Rwys: \*



# AERODROME CHART

EFF 15 MAR 07 CHANGE: Firehall added

**NOT FOR NAVIGATION**

VANCOUVER BC  
VANCOUVER INTL  
NAD83

Source of Canadian Civil Aeronautical Data : © 2007 NAV CANADA All rights reserved