

STAR (RNAV) RWYS 08L & 08R
CANUCK SEVEN ARR (BOOTH.CANUC 7)

ALL ALTITUDES WILL BE ISSUED BY ATC

If RNAV STAR includes a DTW, the following procedures apply.


If approach clearance is **NOT RECEIVED** prior to DTW

- Fly depicted heading **••••→**
- Expect radar vectors to final

If approach clearance **RECEIVED** prior to DTW

- Fly **RNAV STAR** via **DTW**, then
- Via **FACF**, then
- Fly the **STRAIGHT-IN** approach

ATIS 124.6
ARR 128.17(Outer) 133.1(Inner)
352.7
TWR 119.55(N) 118.7(S)
226.5

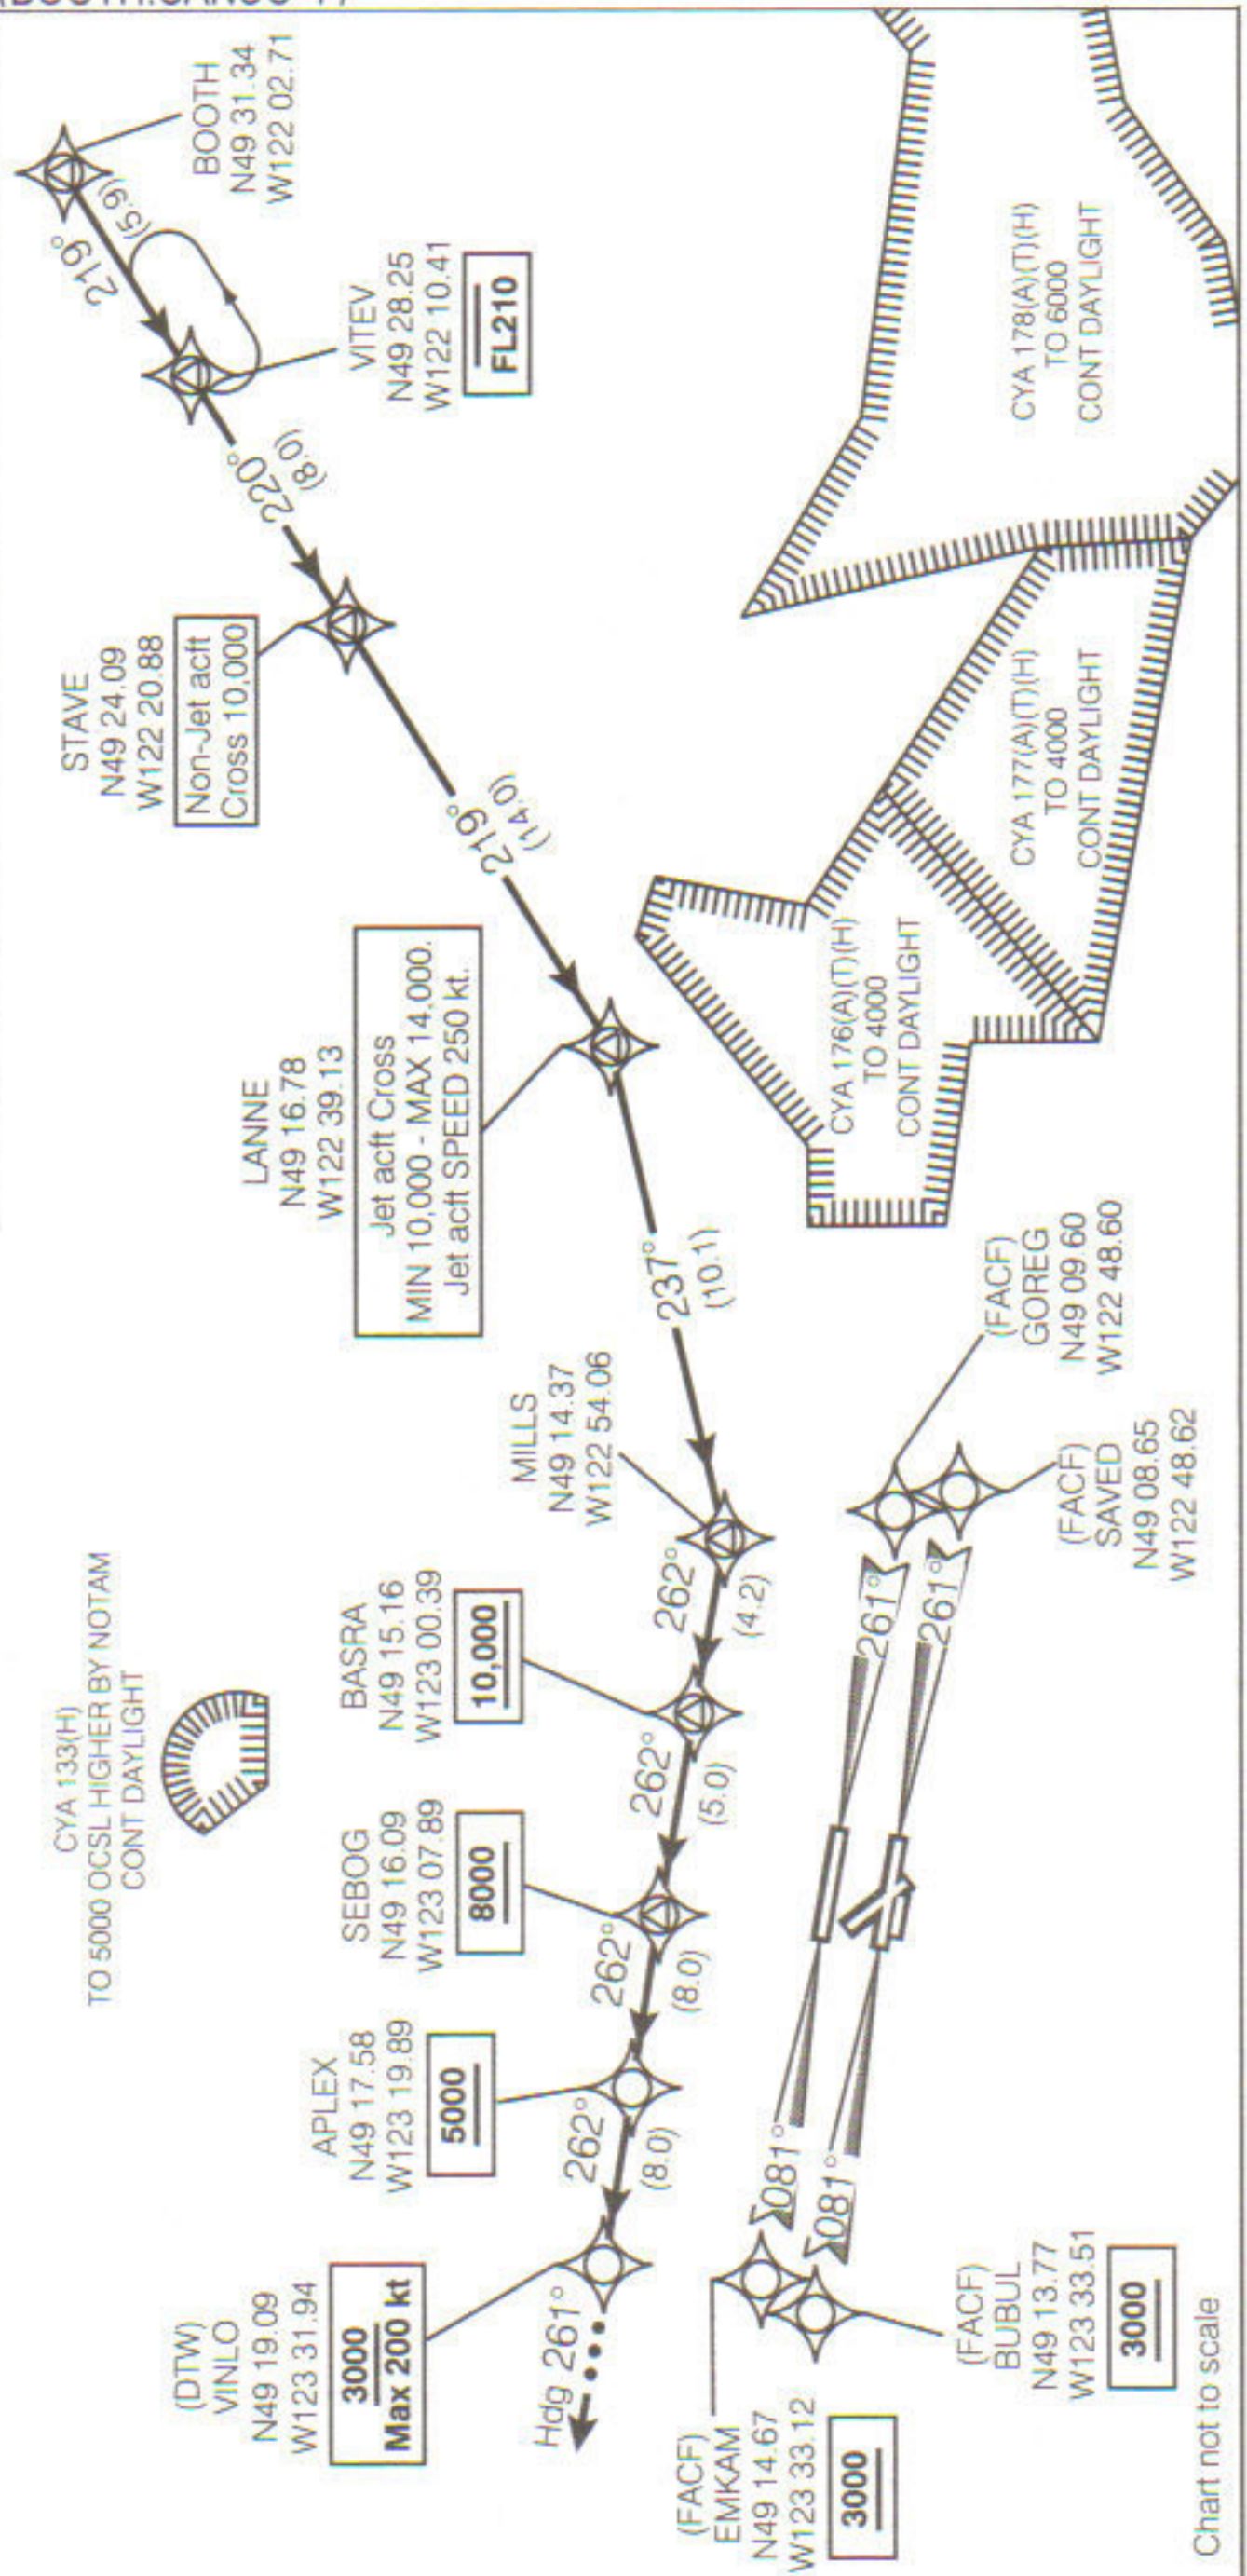

Source of Canadian Civil Aeronautical Data : © 2007 NAV CANADA All rights reserved

CANUCK SEVEN ARR (BOOTH.CANUC 7)

VAR 19°E (2003)

VANCOUVER BC
VANCOUVER INTL